


The Right Measure



Meters for all consumer segments and applications

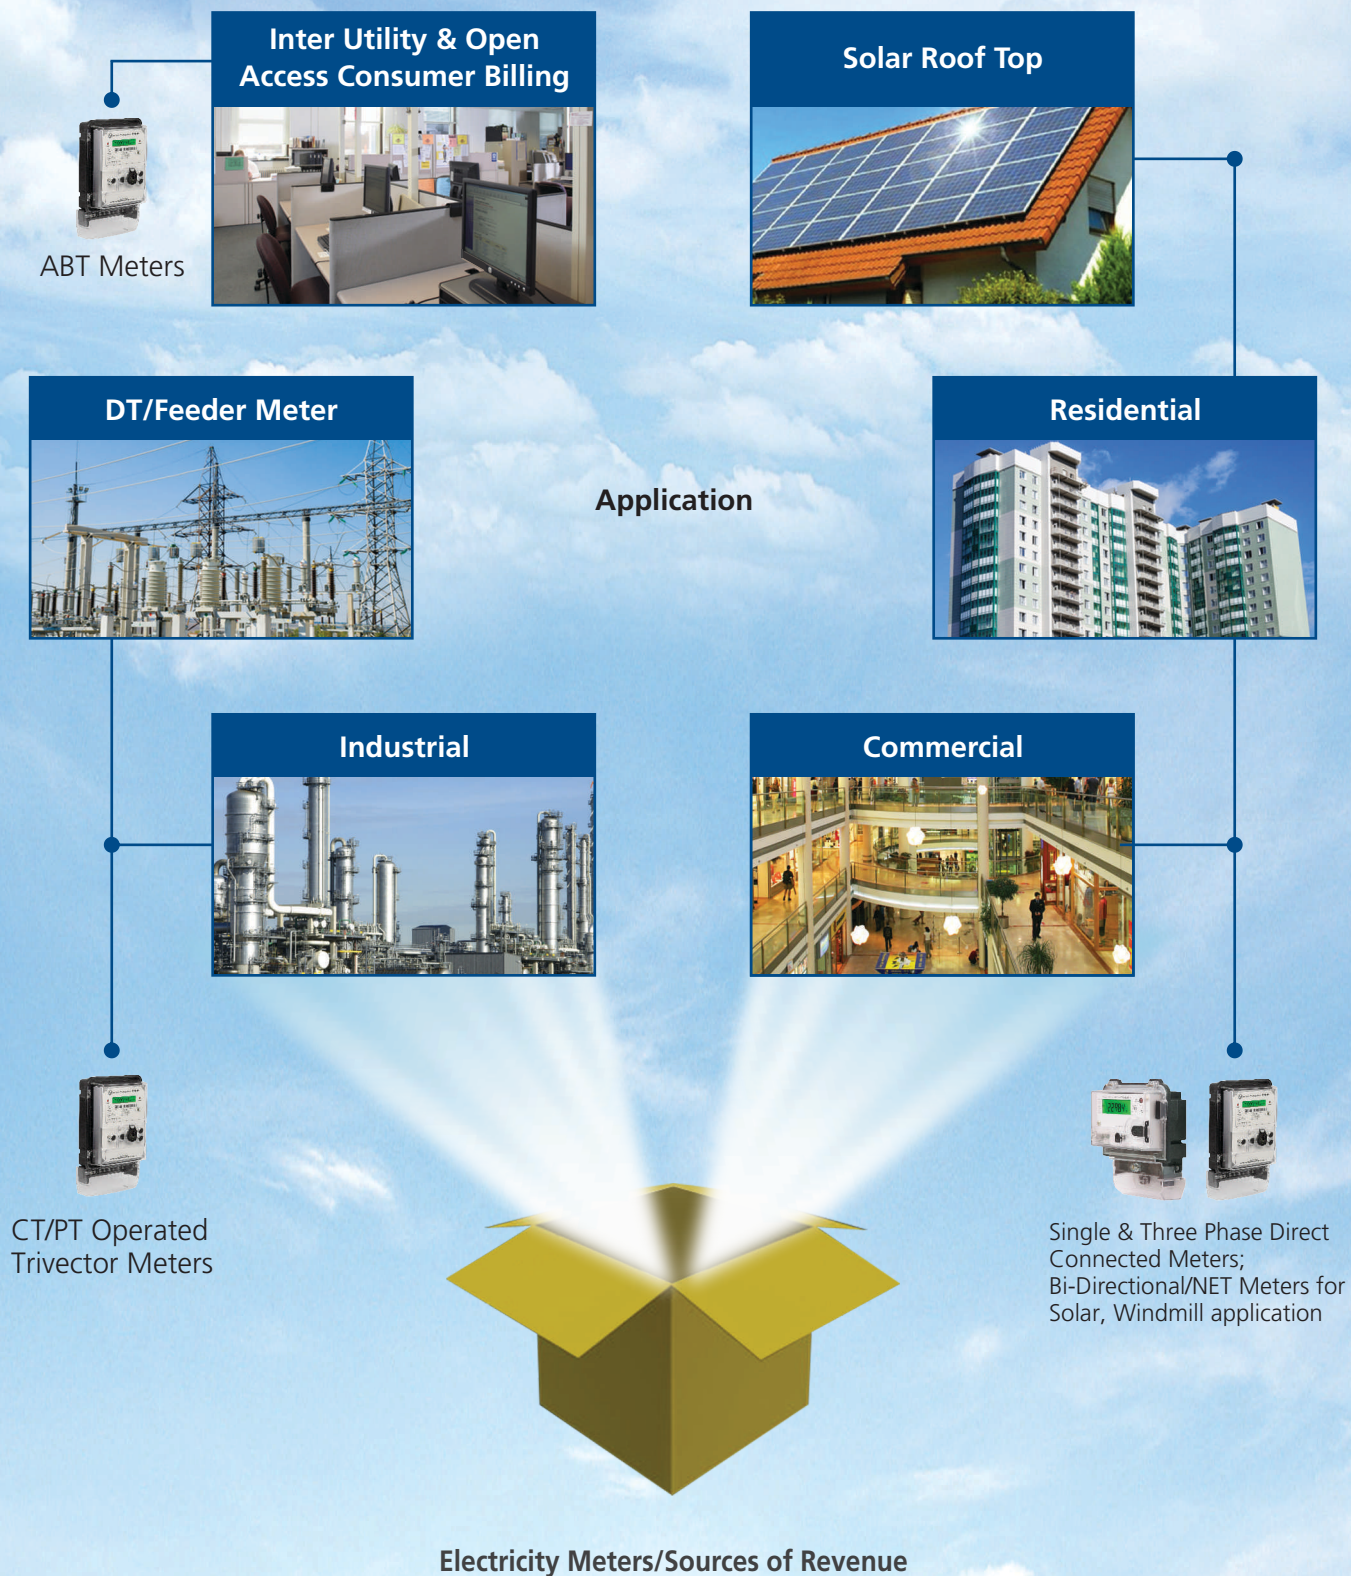

Single Phase Energy Meter



EM101+

Salient Features

- Class 1 accuracy as per IS13779
- Fully static & compact in size with bright LCD display
- Current rating 5-30A & 10-60A
- Display consists of auto scrolling, manual scrolling (6+0 digit), battery mode & high resolution mode (2+4 digits)
- Wide range of communication options - Optical/ RS 232/RF (optional)/DLMS (Optional)
- Anti-tamper features
- Forward energy recording irrespective of current direction
- High surge withstand capability
- Load surveys are available for 90 days with voltage, current, PF, KW & KVA
- Non time based reset backup or billing profile for last 12 months
- Display and data reading in power OFF condition (with in-built battery model only)
- Bi-directional energy recording available (Optional-applicable for solar application)
- Meters are available with suitable hinge type polycarbonate enclosures/boxes (optional)
- Provisions for meter terminal sealing arrangement to prevent tampers
- To download NVM data base computer software & optical to USB cables are also available (on request & chargeable basis)

Technical Specifications

ELECTRICAL

Connection	1 Phase 2 Wire Whole Current type
Accuracy	Class 1 as per IS13779
Rated voltage	240 V
Voltage variation	+20% to -50%
Current rating	5-30 A, 10-60 A
Starting current	0.2% of basic current
Frequency	50Hz $\pm$ 5%
Power consumption	As per IS13779

STANDARD COMPLIANCE

Applicable standards	IS13779
----------------------	---------

ENVIRONMENTAL CONDITIONS

Operating temperature	-10°C to +55°C
Ingress Protection (IP)	IP51

DISPLAY

LCD	(6+0) digits backlit display & (2+4) digits high resolutions display.
LED indicators	Pulse LED for kWh


PARAMETERS SUPPORTED (As per customer requirements)

Maximum Demand (MD)	kW and kVA along with date and demand integration period is 30 min.
Instantaneous parameters	Voltage, phase and neutral current, active and apparent powers, power factor, frequency
Time of day tariff	TOD 1 for 00-24Hr
Cumulative parameters	kWh, kVAh energies

OTHER FEATURES

Tamper proofing provision	1. Top cover open
	2. Single wire operation or neutral missing
	3. Earth load tamper
	4. Current reversal.
	5. Magnetic logging.
Communication	Optical IEC1107/ DLMS (optional)

Mechanical Dimensions

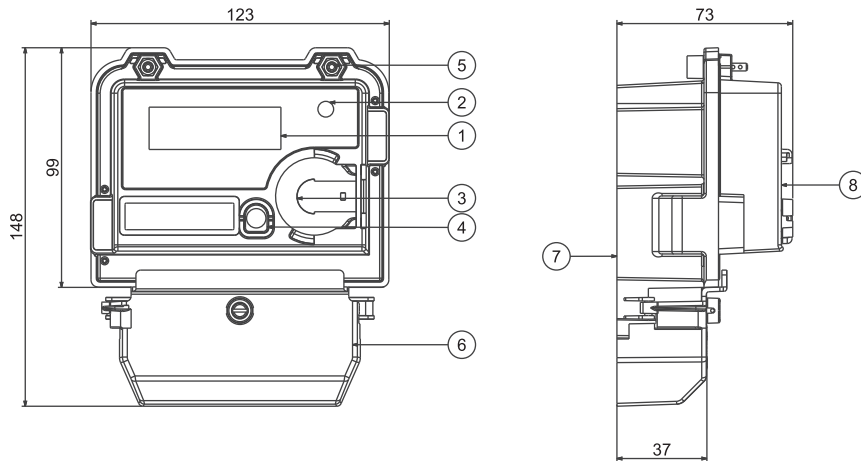

1. LCD Display	5. Sealing Screw
2. LED	6. Terminal Cover
3. Optical Port	7. Meter Base
4. Push Button	8. Meter Cover

Note: Actual meter dimensions will depend on meter configuration

Ordering Informations for Single phase Meter

CAT No	Optical port/ IEC1107	Internal Battery	RTC	Polycarbonate Box-Hinge type	Rated Voltage (V)	Current Rating (A)	Display Digits (Nos)	Cumulative KWH	MD in KW & KVA	Load Survey	Last 6 Month KWH Value in Display & Last 12 Months in NVM
WM101BC5DDH	Yes	Yes	Yes	No	240	5-30	6+0	Yes	Yes	Yes	Yes
WM101BC5DDHBOX	Yes	Yes	Yes	Yes	240	5-30	6+0	Yes	Yes	Yes	Yes
WM101BC7DDH	Yes	Yes	Yes	No	240	10-60	6+0	Yes	Yes	Yes	Yes
WM101BC7DDHBOX	Yes	Yes	Yes	Yes	240	10-60	6+0	Yes	Yes	Yes	Yes
WM101BC5DL0	NO	NO	Yes	No	240	5-30	6+0	Yes	NO	NO	NO
WM101BC5DL0BOX	NO	NO	Yes	Yes	240	5-30	6+0	Yes	NO	NO	NO
WM101BC7DL0	NO	NO	Yes	No	240	10-60	6+0	Yes	NO	NO	NO
WM101BC7DL0BOX	NO	NO	Yes	Yes	240	10-60	6+0	Yes	NO	NO	NO

Trivector Meter



Salient Features

- Accuracy class 0.2s, 0.5s, 1.0 as per relevant IS standards
- Suitable for Bi-directional solar/NET metering application (Optional)
- RS485 modbus available in 10-60A Whole Current meters
- Configurable multiple tariffs and maximum demand registers
- Communication via optical / RS 232 / RS 485 / RF / IR / IrDA (optional)
- Anti-tamper features
- Full four quadrant operation
- Display and data reading in power OFF condition
- Factory programmable for unidirectional or Bi-directional
- Suitable hinge type polycarbonate boxes are available (optional)

ER300 P

Technical Specifications

ELECTRICAL

Connection	Meter is 3P 4W suitable for 3P 4W Wire and 3P 3W system
Accuracy	Class 0.2s/0.5s as per IS14697 Class 1.0 as per IS13779
• Whole current / Direct Connected	240 V (P-N)
• CT Operated 3 Phase 4 Wire	240 V (P-N)
• CT/PT Operated 3 Phase 4 Wire	63.5 V (P-N)
3 Phase 3 Wire	110 V (P-P)
Voltage variation	
• Whole current / Direct Connected	-40% to +20%
CT Operated	-30% to +20%
CT/PT Operated	
Current Rating	
• Whole current / Direct Connected	10-60 A, 20-100 A
• CT/VT Operated	
Basic	1A, 5A
Maximum	120 % of basic current (200 % basic current- Optional)
Frequency	50Hz $\pm$ 5%
Power Consumption	As per IS14697 for CT/PT operated As per IS13779 for whole current

STANDARD COMPLIANCE

Applicable standards	IS13779 for class 1 IS14697 for Class 0.2s/0.5s IEC62053-21, IEC62053-22
----------------------	--

ENVIRONMENTAL CONDITIONS

Operating temperature	-10°C to +55°C
Ingress Protection (IP)	P51

PARAMETERS SUPPORTED (As per customer requirements)

Maximum Demand (MD)	kW and kVA along with date and time
Instantaneous parameters	Phase wise voltages and currents, active reactive and apparent powers, power factor, frequency
Time of Day Tariff	Up to 8 Registers, profiles and seasons
Energy measurement	4 quadrant measurement of kWh, kVAh, and kVAh


Display

LCD	8 digit backlit display
Display Mode	Auto scroll, push button and high resolution modes
LED	Pulse LEDs for kWh and kVAh

OTHER FEATURES

Load survey	kVAh, kWh, kVAh lag, kVAh lead, voltages and currents
Data Security	Multi level password for data reading and programming
Communication	Electrically isolated optical port as per IS15959/ IEC62056-21 (DLMS)
Optional communication interfaces	RS 232 / RS 485 / IR / IrDA/ RF (2.4 Gliz/865-867 MHz)
Protocol supported	DLMS as per IS15959 (optional)
Tamper Detection (as per	Missing Potential, Voltage related tampers, Current related tampers, Low Power Factor, Meter Cover Open, Abnormal Magnetic influence, Wrong phase sequence detection
Tamper proofing provision	Ultrasonic welding available (optional)

Mechanical Dimensions

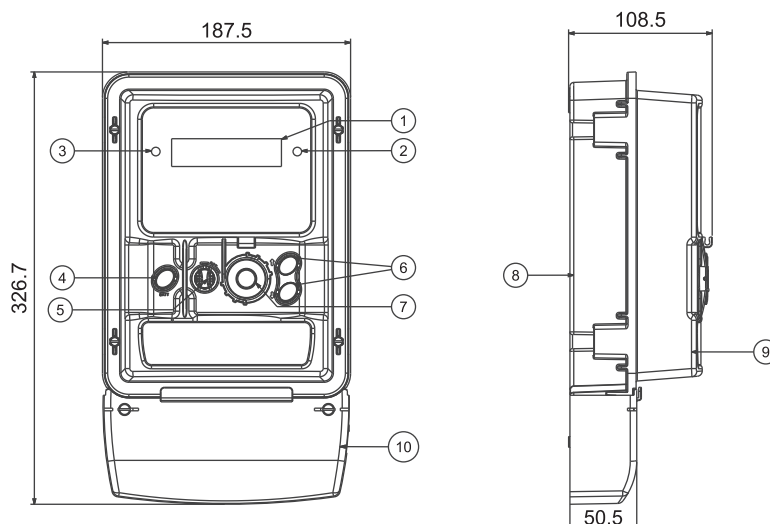

1. LCD Display
2. LED kVAh
3. LED kWh
4. Battery Push Button
5. Reset Push Button
6. Up/Down Scroll Push Button
7. Optical Port
8. Meter Base
9. Meter Cover
10. Terminal Cover

Note: Actual meter dimensions will depend on meter configuration

Ordering information for Trivector Meters, WC & LTCT Meters, Accuracy -1.0 for WC & 0.5s for LTCT

CAT No	Accuracy Class	Internal Battery	RTC	Additional Port-RS485 Modbus	Rated Voltage (V) (P-P/P-N)	Current Rating (A)	Display Digits (Nos)	Cumulative KWH	MD in KW & KVA	Load Survey 40 days for all energy values	CT Ratio need to be provided at the time of ordering
WR300BC7300	1	Yes	Yes	No	415/240	10-60A	6+2	Yes	Yes	Yes	NO
WR300BC73RS485	1	Yes	Yes	Yes	415/240	10-60A	6+2	Yes	Yes	Yes	NO
WR300BC5200	0.5s	Yes	Yes	No	415/240	/5	6+2	Yes	Yes	Yes	Yes
WR300BC1200	0.5s	Yes	Yes	No	415/240	/1	6+2	Yes	Yes	Yes	Yes
WR300BC52RS	0.5s	Yes	Yes	Yes	415/240	/5	6+2	Yes	Yes	Yes	Yes
WR300BC12RS	0.5s	Yes	Yes	Yes	415/240	/1	6+2	Yes	Yes	Yes	Yes

Ordering information for Trivector Meters-HT CT/PT Operated 0.5s or 0.2s

CAT No	Accuracy Class	Internal Battery	RTC	Additional Port-RS485 Modbus	Rated Voltage (V) (P-P/P-N)	Current Rating (A)	Display Digits (Nos)	Cumulative KWH	MD in KW & KVA	Load Survey 40 days for all energy values	CT Ratio need to be provided at the time of ordering
WR300BB5200	0.5s	Yes	Yes	No	110/63.5	/5	6+2	Yes	Yes	Yes	Yes
WR300BB52RS	0.5s	Yes	Yes	Yes	110/63.5	/5	6+2	Yes	Yes	Yes	Yes
WR300BB1200	0.5s	Yes	Yes	No	110/63.5	/1	6+2	Yes	Yes	Yes	Yes
WR300BB12RS	0.5s	Yes	Yes	Yes	110/63.5	/1	6+2	Yes	Yes	Yes	Yes
WR300BB5100	0.2s	Yes	Yes	No	110/63.5	/5	6+2	Yes	Yes	Yes	Yes
WR300BB51RS	0.2s	Yes	Yes	Yes	110/63.5	/5	6+2	Yes	Yes	Yes	Yes
WR300BB1100	0.2s	Yes	Yes	No	110/63.5	/1	6+2	Yes	Yes	Yes	Yes
WR300BB11RS	0.2s	Yes	Yes	Yes	110/63.5	/1	6+2	Yes	Yes	Yes	Yes

ABT (Availability Based Tariff) Meter



Salient Features

- Accuracy class 0.2s as per relevant IS 14697
- Frequency based energy measurement
- Suitable for inter-utility or open access consumer billing
- Store energy values in every 15 mins block along with avg frequency in same interval
- ABT meters are also available as per PGCIL specs, guidelines & capable of convert data in NPC format (Power Grid's report format)
- Consider Step frequency 0.01Hz.
- Communication via optical (IEC 1107/DLMS) / RS232 / RS485 (MODBUS/DLMS)-(Optional)
- Anti-tamper features
- Display and data reading in power OFF condition
- Capable of recording Load Survey data & easy download through Base Computer Software
- Approved in all major utilities across the country

ER300 P

Technical Specifications

ELECTRICAL

Connection	3 Phase 4 Wire
Accuracy	Class 0.2s/0.5s (active/reactive) as per IS14697 or 0.2s/0.2s (active/active).
• CT/PT Operated	
3 Phase 4 Wire	63.5 V (P-N)
3 Phase 3 Wire	110 V (P-P)
Voltage variation	
• Whole current /	-40% to +20%
Direct Connected	
• CT Operated	-30% to +20%
CT/PT operated	
Current Rating	
• CT/VT Operated	
Basic	1A, 5A
Maximum	120 % of basic current (200 % basic current-Optional)
Frequency	50Hz $\pm$ 5%
Power Consumption	As per IS14697 for CT/PT operated

STANDARD COMPLIANCE

Applicable standards	IS14697 for Class 0.2s/0.5s IEC62053-21, IEC62053-22
----------------------	---

ENVIRONMENTAL CONDITIONS

Operating temperature	-10°C to +55°C
Ingress Protection (IP)	P51

PARAMETERS SUPPORTED (As per customer requirements)

Maximum Demand (MD)	kW and kVA along with date and time (Optional)
Instantaneous parameters	Phase wise voltages and currents, active reactive and apparent powers, power factor, frequency
Time of Day Tariff	Up to 8 Registers, profiles and seasons (Optional)
Energy measurement	Frequency based.

Display

LCD	8 digit backlit display
Display Mode	Auto scroll, push button and high resolution modes


LED

Pulse LEDs for kWh and kVAh

OTHER FEATURES

Load survey	kVAh, kWh, kVAh lag, kVAh lead, phase wise voltages and currents
Data Security	Multi level password for data reading and programming
Communication	Electrically isolated optical port as per IS15959/ IEC62056-21 (DLMS, CAT B)
Optional communication interfaces	RS 232 / RS 485.
Protocol supported	DLMS as per IS15959 and MODBUS (For RS485)
Tamper Detection (as per customer requirements)	Missing Potential, Voltage related tampers, Current related tampers, Low Power Factor, Meter Cover Open, Abnormal Magnetic influence, Wrong phase sequence detection
Tamper proofing provision	Ultrasonic welding available.

Mechanical Dimensions

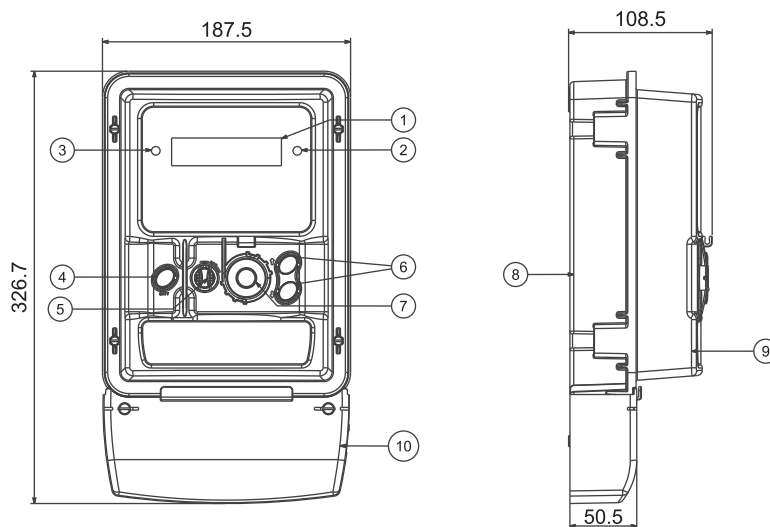

1. LCD Display
2. LED kVAh
3. LED kWh
4. Battery Push Button
5. Reset Push Button
6. Up/Down Scroll Push Button
7. Optical Port
8. Meter Base
9. Meter Cover
10. Terminal Cover

Note: Actual meter dimensions will depend on meter configuration

For CAT Nos. details of ABT meters contact with nearest branch offices.

Electrical Standard Products (ESP) Offices:

HEAD OFFICE

L&T Business Park,
Tower 'B' / 3rd Floor
Saki Vihar Road, Powai
Mumbai 400 072
Tel: 022-67053229
Fax: 022-67051112
e-mail: cic@LNTEBG.com

BRANCH OFFICES

501, Sakar Complex I
Opp. Gandhigram Rly. Station
Ashram Road
Ahmedabad 380 009
Tel: 079-66304006-11
Fax: 079-66304025
e-mail: esp-ahm@LNTEBG.com

38, Cubbon Road, P. O. Box 5098
Bengaluru 560 001
Tel: 080-25020100 / 25020324
Fax: 080-25580525
e-mail: esp-blr@LNTEBG.com

131/1, Zone II
Maharana Pratap Nagar
Bhopal 462 011
Tel: 0755-3080511 / 05 / 08 / 13 / 17 / 19
Fax: 0755-3080502
e-mail: esp-bho@LNTEBG.com

Plot No. 559, Annapurna Complex
Lewis Road
Bhubaneswar 751 014
Tel: 0674-6451342 / 2436690 / 2436696
Fax: 0674-2537309
e-mail: esp-bsr@LNTEBG.com

Aspire Towers, 4th Floor
Plot No. 55, Phase-I
Industrial & Business Park
Chandigarh-160 002
Tel: 0172-4646840 / 41 / 42 / 46 / 53
Fax: 0172-4646802
Email: esp-chd@Lntebg.com

L&T Construction Campus
TC-1 Building, II Floor
Mount-Poonamallee Road
Manapakkam
Chennai 600 089
Tel: 044-2270 6800
Fax: 044-22706940
e-mail: esp-maa1@LNTEBG.com

67, Appuswamy Road
Post Bag 7156
Opp. Nirmala College
Coimbatore 641 045
Tel: 0422-2588120 / 1 / 5
Fax: 0422-2588148
e-mail: esp-cbe@LNTEBG.com

Khairasol, Degaul Avenue
Durgapur 713 212
Tel: 0343-2540448 / 2540449 / 2540443
Fax: 0343-2540442
e-mail: esp-dgp@LNTEBG.com

5, Milanpur Road, Bamuni Maidan
Guwahati 781 021
Tel: +91 8876554410 / 8876554417
Fax: 361-2551308
e-mail: esp-ghy@LNTEBG.com

II Floor, Vasantha Chambers
5-10-173, Fateh Maidan Road
Hyderabad 500 004
Tel: 040-67015052
Fax: 040-23296468
e-mail: esp-hyd@LNTEBG.com

Monarch Building, 1st Floor
D-236 & 237, Amrapali Marg
Vaishali Nagar
Jaipur 302 021
Tel: 0141-4385914 to 18
Fax: 0141-4385925
e-mail: esp-jai@LNTEBG.com

Akashdeep Plaza, 2nd Floor
P. O. Golmuri
Jamshedpur 831 003
Jharkhand
Tel: 0657-2312205 / 38
Fax: 0657-2341250
e-mail: esp-jam@LNTEBG.com

Skybright Bldg; M. G. Road
Ravipuram Junction, Ernakulam
Kochi 682 016
Tel: 0484-4409420 / 4 / 5 / 7
Fax: 0484-4409426
e-mail: esp-cok@LNTEBG.com

3-B, Shakespeare Sarani
Kolkata 700 071
Tel: 033-42005982
Fax: 033-22821025 / 7587
e-mail: esp-ccu@LNTEBG.com

A28, Indira Nagar, Faizabad Road
Lucknow 226 016
Tel: 0522-4929905 / 04
Fax: 0522-2311671
e-mail: esp-Lko@LNTEBG.com

No: 73, Karpaga Nagar, 8th Street
K. Pudur
Madurai 625 007
Tel: 0452-2567405 / 2561068 / 2561657
Fax: 0452-2567552
e-mail: esp-mdu@LNTEBG.com

L&T Business Park,
Tower 'B' / 5th Floor
Saki Vihar Road, Powai
Mumbai 400 072
Tel: 022-67052874 / 2737 / 1156
Fax: 022-67051112
e-mail: esp-bom@LNTEBG.com

12, Shivaji Nagar
North Ambajhari Road
Nagpur 440 010
Tel: 0712-2260012 / 6606421
Fax: 2260030 / 6606434
e-mail: esp-nag@LNTEBG.com

32, Shivaji Marg
P. O. Box 6223
New Delhi 110 015
Tel: 011-41419514 / 5 / 6
Fax: 011-41419600
e-mail: esp-del@LNTEBG.com

L&T House
P. O. Box 119
191/1, Dhole Patil Road
Pune 411 001
Tel: 020-66033395 / 66033279
Fax: 020-26164048 / 26164910
e-mail: esp-pnq@LNTEBG.com

Crystal Tower,
4th Floor, G. E. Road
Telibandha
Raipur - 492 006
Tel: 0771-4283214
e-mail: esp-raipur@LNTEBG.com

3rd Floor
Vishwakarma Chambers
Majura Gate, Ring Road
Surat 395 002
Tel: 0261-2473726
Fax: 0261-2477078
e-mail: esp-sur@LNTEBG.com

Radhadaya Complex
Old Padra Road
Near Charotar Society
Vadodara 390 007
Tel: 0265-6613610 / 1 / 2
Fax: 0265-2336184
e-mail: esp-bar@LNTEBG.com

Door No. 49-38-14/3/2, 1st floor,
NGGO's Colony, Akkayyapalem,
Visakhapatnam - 530 016
Tel: 0891-2791126 / 2711125
Fax: 0891-2791100
Email: esp-viz@LNTEBG.com

Product improvement is a continuous process. For the latest information and special applications, please contact any of our offices listed here.



Larsen & Toubro Limited, Electrical Standard Products
Powai Campus, Mumbai 400 072

Customer Interaction Center (CIC)

BSNL / MTNL (toll free) : 1800 233 5858 Reliance (toll free) : 1800 200 5858
Tel : 022 6774 5858, Fax : 022 6774 5859
E-mail : cic@Lntebg.com / Website : www.Lntebg.com

Registered Office: L&T House, N. M. Marg, Ballard Estate, Mumbai 400 001, INDIA **CIN:** L99999MH1946PLC004768